

10-02-00

A

Patent
Attorney's Docket No. 032986-006

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY PATENT
APPLICATION TRANSMITTAL LETTER

Box PATENT APPLICATION

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Enclosed for filing is the utility patent application of Leslie GRAF, Mark HOLLIS, Stephen TERRILL, Christian GROVES, Ian RYTINA, Juan NOGUERA-RODRIGUEZ for Addressing in a Communications Network.

Also enclosed are:

- ☒ 3 sheet(s) of ☒ formal ☐ informal drawing(s);
- ☒ a claim for foreign priority under 35 U.S.C. §§ 119 is hereby made to 9923121.9 filed in United Kingdom on October 1, 1999; ☒ and in the Declaration.
- ☒ a certified copy of the priority document;
- ☒ an Assignment document;
- ☒ An executed declaration of the inventors also is enclosed.
- ☒ Please amend the specification by inserting before the first line the sentence --This application claims priority under 35 U.S.C. §§ 119 and/or 365 to 9923121.9 filed in United Kingdom on October 1, 1999; the entire content of which is hereby incorporated by reference.--

The filing fee has been calculated as follows ☒ and in accordance with the enclosed preliminary amendment:

| CLAIMS | | | | | |
|--|------------------|------------|-----------------|-------------------|-----------|
| | NO. OF CLAIMS | | EXTRA CLAIMS | RATE | FEE |
| Basic Application Fee | | | | (101) | \$ 690.00 |
| Total Claims | 6 | MINUS 20 = | 0 | x \$18 = (103) | 0.00 |
| Independent Claims | 3 | MINUS 3 = | 0 | x \$78 = (102) | 0.00 |
| If multiple dependent claims are presented, add \$260.00 (104) | | | | | 0.00 |



21839

09/29/00
jc613 U.S. PTO

jc511 U.S. PTO
09/29/00
09/29/00

| | |
|--|-----------------|
| Total Application Fee | 690.00 |
| If verified statement claiming small entity status is enclosed, subtract 50% of Total Application Fee | 0.00 |
| Add Assignment Recording Fee of \$40.00 (581) if Assignment document is enclosed | 40.00 |
| TOTAL APPLICATION FEE DUE | \$730.00 |

[X] Charge \$ 730.00 to Deposit Account No. 02-4800 for the fee due.

[X] The Commissioner is hereby authorized to charge any appropriate fees under 37 C.F.R. §§ 1.16, 1.17 and 1.21 that may be required by this paper, and to credit any overpayment, to Deposit Account No. 02-4800. This paper is submitted in duplicate.

Please address all correspondence concerning the present application to:


Ronald L. Grudziecki, Esquire
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 22313-1404.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

P.O. Box 1404
Alexandria, Virginia 22313-1404
(919) 941-9240

By:



Michael G. Savage
Registration No. 32,596

Date: September 29, 2000

"Express Mail" mailing label No. E1581399788US

Date of Deposit 9/29/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.



(Type or printed name of person mailing paper or fee)


(Signature of person mailing paper or fee)

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

| | | |
|-------------------------------------|---|----------------------------|
| In re Patent Application of |) | |
| |) | |
| Leslie GRAF et al. |) | Group Art Unit: Unassigned |
| |) | |
| Application No.: Unassigned |) | Examiner: Unassigned |
| |) | |
| Filed: September 29, 2000 |) | |
| |) | |
| For: Addressing in a Communications |) | |
| Network |) | |

PRELIMINARY AMENDMENT

Assistant Commissioner for Patents
Washington, D.C. 20231

Sir:

Before examination, please amend this application as follows.

IN THE SPECIFICATION

Page 1, line 2, delete "Field of the Invention" and insert therefor --Background--; and
line 6, delete "Background to the invention".

Page 3, line 1, delete "of the Present Invention".

Page 5, line 1, delete "of Certain Embodiments".

IN THE CLAIMS

Page 8, line 1, delete "CLAIMS" and insert therefor --What Is Claimed Is:--.

Claim 1, line 7, delete "the" and insert therefor --a--.

Claim 3, line 3, delete "using" and insert therefor --use--.

Claim 5, line 7, delete "the" and insert therefor --a--.

Claim 6, line 3, delete "Controller";

line 5, change "media gateway" to --Media Gateway--; and

line 10, delete "the" and insert therefor --a--.

IN THE ABSTRACT


Please delete the Abstract found on page 10, and insert the new Abstract attached below as a separate sheet.

REMARKS

The written description and claims have been amended and the Abstract has been replaced to place the application in better form for examination. Favorable consideration is respectfully solicited.

Respectfully submitted,

BURNS, DOANE, SWECKER & MATHIS, L.L.P.

By: 
Michael G. Savage
Registration No. 32,596


P.O. Box 1404
Alexandria, Virginia 22313-1404
(919) 941-9240

Dated: September 29, 2000

"Express Mail" mailing label No. EL581399788WS

Date of Deposit 9/29/00

I hereby certify that this paper or fee is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 CFR 1.10 on the date indicated above and is addressed to the Commissioner of Patents and Trademarks, Washington, D.C. 20231.



(Type or printed name of person mailing paper or fee)


(Signature of person mailing paper or fee)

ADDRESSING IN A COMMUNICATIONS NETWORK

Field of the Invention

The present invention relates to addressing in a communications network and in particular to addressing in a communications network in which network nodes are split into a call control part and a bearer control part.

Background to the invention

Telecommunications networks currently rely to a large extent upon the Signalling System no.7 (SS7) as the mechanism for controlling call connections and for handling the transfer of signalling information between signalling points of the networks. Typically, one or more application and user parts at a given signalling point will make use of SS7 to communicate with peer application and user parts at some other signalling point. Examples of user parts are ISUP (ISDN User Part) and TUP (Telephony User Part) whilst examples of application parts are INAP (Intelligent Network Application Part) and MAP (Mobile Application Part). The conventional SS7 protocol stack includes Message Transfer Parts MTP1, MTP2, and MTP3 which handle the formatting of signalling messages for transport over the physical layer as well as various routing functions.

There has been considerable interest of late amongst the telecommunications community in using non-standard (i.e. non-conventional within the telecommunications industry) signalling transport mechanisms in telecommunications networks in place of the conventional SS7 mechanisms. The reasons for this are related both to improvements in efficiency as well as potential cost savings. Much consideration has been given for example to the use of Internet Protocol (IP) networks to transport signalling information between signalling points. IP networks have the advantage that they make efficient use of transmission resources by using packet switching and are relatively low in cost due to the widespread use of the technology (as opposed to specialised telecommunication technology). There is also interest in using other transport mechanisms including AAL1/2/5, FR etc.

ISUP, which deals with the setting-up and control of call connections in a telecommunications network, is closely linked to the SS7 signalling transport mechanism and does not readily lend itself to use with other non-standard transport technologies such as IP and AAL2. As such, several standardisation bodies including the ITU-T, ETSI, and ANSI, are currently considering the specification of a signalling protocol for the control of calls, which is independent of the underlying transport mechanism. This is illustrated in Figure 1 and can be viewed as separating out from the protocol, Bearer Control functions which relate merely to establishing the parameters (including the start and end points) of the "pipe" via which user plane data is transported between nodes, and which are specific to the transport mechanism. The new protocol, referred to as Bearer Independent Call Control (BICC) or Transport Independent Call Control (TICC), retains Call Control functions such as the services invoked for a call between given calling and called parties (e.g. call forwarding), and the overall routing of user plane data.

The new network architecture resulting from the separation of the Call and Bearer Control levels results in an open interface appearing between a Call Control entity and a Bearer Control entity, where these entities are referred to as a Media Gateway Controller and a Media Gateway respectively. The open interface is referred to hereinafter as X-CP, examples of which are the MEGACO work of the IETF and the H.248 work of ITU Study Group 16 (SG16). It is envisaged that a given Media Gateway Controller may control several Media Gateways.

Despite the decoupling of the Call and Bearer Control levels, it remains necessary to convey information about the Bearer Control level at the Call Control level in order to establish bearer connections between Media Gateways for a call. In particular, it is necessary to convey on a per call basis the addresses of Media Gateways between peer Media Gateway Controllers, where the identified Media Gateways are responsible for handling the bearer connection for the call. Current proposals are to provide an addressing mechanism in the BICC protocol which is specific to ITU-T E.164 addresses.

Summary of the Present Invention.

In order to maximise the flexibility of the BICC protocol, it is desirable to avoid making it specific to a given transport technology, e.g. IP or AAL2. This will necessitate the provision of an addressing mechanism within the BICC protocol which caters for different address formats. This flexibility is not afforded by the current proposal to restrict BICC addressing to the use of E.164 addresses.

The inventors of the present invention have recognised that a flexible addressing mechanism suitable for use in the BICC protocol is provided by ITU-T recommendation X.213 which defines the so-called Network Service Access Point (NSAP) addressing format.

According to a first aspect of the present invention there is provided a method of signalling in a communications system comprising a Call Control level and a Bearer Control level, where the Call Control level comprises a plurality of Media Gateway Controllers and the Bearer Control level comprises a plurality of Media Gateways each of which is controlled by a Media Gateway Controller, the method comprising allocating to each Media Gateway at least one address, which address corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using the Network Service Access Point (NSAP) addressing format.

The present invention may be used in a telecommunications network in which the Call Control level is used to establish and control call connections, e.g. between a calling party and a called party, at the Bearer Control level.

The Media Gateways provide access to transport networks which extend between peer Media Gateways. These transport networks may be, for example, IP, AAL2, or ATM networks. The format of the at least one address allocated to a Media Gateway is the format used by a transport network to which that Media Gateway provides access. Where a Media Gateway provides access to two or more transport networks, the Media Gateway may be allocated respective addresses.

According to a second aspect of the present invention there is provided a communications system comprising:

a Call Control level comprising a plurality of Media Gateway Controllers; and

a Bearer Control level comprising a plurality of Media Gateways each of which is controlled by a Media Gateway Controller and each of which is allocated at least one address which address corresponds to one of a plurality of different addressing formats,

wherein said peer Media Gateway Controllers are arranged to communicate Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

According to a third aspect of the present invention there is provided a Media Gateway Controller of a communications system, the Media Gateway Controller comprising:

means for communicating with at least one Media Gateway Controller for the purpose of establishing and controlling call connections over a transport network to which the Media Gateway is coupled, the media gateway being allocated at least one address which address corresponds to one of a plurality of different addressing formats; and

means for communicating with at least one peer Media Gateway Controller using a Bearer Independent Call Control (BICC) protocol, the BICC protocol conveying Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

Brief Description of the Drawings

Figure 1 illustrates a telecommunications network in which the Call Control level is independent of the Bearer level;

Figure 2 illustrates a telecommunications network comprising Media Gateway Controllers and Media Gateways;

Figure 3 illustrates the structure of an NSAP address;

Figure 4 illustrates a forward call set-up process in the network of Figure 2; and

Figure 5 illustrates a backward call set-up process in the network of Figure 2.

Detailed Description of Certain Embodiments

Figure 1 illustrates in very general terms a telecommunications network in which signalling points are split into Media Gateway Controllers and Media Gateways, where the Media Gateway Controllers form a Call Control (CC) layer and the Media Gateways form a Bearer Control (BC) layer. Figure 2 provides a more detailed illustration of an example network

The CC level comprises a number of Media Gateway Controllers (MGC_A, MGC_B, MGC_C) whilst the BC level comprises a number of Media Gateways (MG_1 to MG_4). As is apparent from Figure 2, each of the Media Gateway Controllers is arranged to control either one or two Media Gateways via an open interface (X-CP_1 to X-CP_3). A first pair of Media Gateways (MG_1, MG_4) provide a bearer connection over an intervening IP transport network, whilst a second pair of Media Gateways (MG_2, MG_3) provide a bearer connection over an intervening AAL2 network which uses the Q.2630.1 signalling protocol. In addition, Media Gateway MG_1 is connected to a second IP network whilst Gateways MG_2 to MG_4 are connected to respective second, third, and fourth AAL2 networks.

In order to send and receive data over a transport network (IP or AAL2), a Media Gateway must have an address in that network, the address using the network's addressing format. Thus, for example, the Media Gateways MG_1 and MG_4 must be allocated an IP address for use over the intervening IP network. Media Gateway MG_1 may use that same address to communicate over the second IP network or it may be allocated a different address for use in that network. Similarly, the Media Gateways MG_2 to MG_4 must be allocated an AAL2 address for use in the AAL2 networks with which they communicate. The actual process by which these transport network addresses are allocated will not be described here in detail. It is suffice to note that an address allocated to a Media Gateway for use over a given transport network will be unique within that network.

In order to allow the BICC protocol to be compatible with a range of transport networks, it is proposed here to use in that protocol the addressing format defined by

ITU-T recommendation X.213. This is known as the Network Service Access Point (NSAP) addressing format. An NSAP address has the structure illustrated in Figure 3.

The initial domain part of the NSAP address consists of two parts. The first part is the authority and format identifier (AFI) and the second part is the initial domain identifier (IDI). The authority and format identifier (AFI) specifies:

- a) the format of the IDI;
- b) the network addressing authority responsible for allocating values of the IDI;
- c) whether or not leading zero digits in the IDI are significant; and
- d) the abstract syntax of the DSP.

The initial domain identifier specifies:

- a) the network addressing domain from which values of the DSP are allocated;
and
- b) the network addressing authority responsible for allocating values of the DSP
from that domain.

The semantics of the DSP are determined by the network addressing authority identified by the IDI.

Figure 4 illustrates a first call set-up scenario, i.e. a forward bearer set up scenario. In this example, signalling is conducted over the CC level between Media Gateway Controllers MGC_A and MGC_B to establish a bearer level connection between Media Gateways MG_2 and MG_3. The process commences with an Initial Address Message (IAM) being sent from Media Gateway Controller MGC_A to Media Gateway Controller MGC_B. Media Gateway Controller MGC_B responds to receipt of this message by returning to Media Gateway Controller MGC_A an APplication transport Mechanism (APM - defined in Q.765) message. The APM message contains an NSAP address which in turn contains the address of the Media Gateway MG_3 in the AAL2 network linking Media Gateway MG_2 and Media Gateway MG_3. Media Gateway Controller MGC_A passes the AAL2 address of Media Gateway MG_3 to Media Gateway MG_2. Media Gateway MG_2 then sends an Establish ReQuest (ERQ) message containing in its destination address field the AAL2 address of Media Gateway

MG_3. Media Gateway MG_3 can then return a confirmation Establish ConFirm (ECF) message back to MG_2. Both the ERQ and the ECF messages are defined by the Q.2630.1 signalling protocol.

Figure 5 illustrates a backward bearer set up scenario in which the IAM message sent from the Media Gateway Controller MGC_A contains the AAL2 address, encapsulated in NSAP format, of Media Gateway MG_2. An ERQ message, including in its destination address field the AAL2 address of Media Gateway MG_2, is then sent from the Media Gateway MG_3. The ECF message is subsequently returned from the Media Gateway MG_2 to Media Gateway MG_3.

It will be appreciated by the person of skill in the art that various modifications may be made to the above described embodiment without departing from the scope of the present invention.

CLAIMS

1. A method of signalling in a communications system comprising a Call Control level and a Bearer Control level, where the Call Control level comprises a plurality of Media Gateway Controllers and the Bearer Control level comprises a plurality of Media Gateways each of which is controlled by a Media Gateway Controller, the method comprising allocating to each Media Gateway at least one address, which address corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using the Network Service Access Point (NSAP) addressing format.
2. A method according to claim 1, wherein the communications network is a telecommunications network in which the Call Control level is used to establish and control call connections between a calling party and a called party at the Bearer Control level.
3. A method according to claim 1, wherein the Media Gateways provide access to transport networks which extend between peer Media Gateways, and the networks using one of IP, AAL2, or ATM transmission mechanisms.
4. A method according to claim 1, wherein the format of the at least one address allocated to a Media Gateway is the format used by a transport network to which that Media Gateway provides access.
5. A communications system comprising:
 - a Call Control level comprising a plurality of Media Gateway Controllers; and
 - a Bearer Control level comprising a plurality of Media Gateways each of which is controlled by a Media Gateway Controller and each of which is allocated at least one address which address corresponds to one of a plurality of different addressing formats,wherein said peer Media Gateway Controllers are arranged to communicate Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

6. A Media Gateway Controller of a communications system, the Media Gateway Controller comprising:

means for communicating with at least one Media Gateway Controller for the purpose of establishing and controlling call connections over a transport network to which the Media Gateway is coupled, the media gateway being allocated at least one address which address corresponds to one of a plurality of different addressing formats; and

means for communicating with at least one peer Media Gateway Controller using a Bearer Independent Call Control (BICC) protocol, the BICC protocol conveying Media Gateway addresses by encapsulating them using the Network Service Access Point (NSAP) addressing format.

ABSTRACT
ADDRESSING IN A TELECOMMUNICATIONS NETWORK

A method of signalling in a telecommunications system comprising a Call Control (CC) level and a Bearer Control (BC) level, where the Call Control level comprises a plurality of Media Gateway Controllers (MGC_A, MGC_B, MGC_C) and the Bearer Control level comprises a plurality of Media Gateways (MG_1 to MG_4) each of which is controlled by a Media Gateway Controller. The method comprises allocating to each Media Gateway at least one address, which address corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using the Network Service Access Point (NSAP) addressing format.

Figure 2

A method of signalling in a telecommunications system that includes a Call Control level and a Bearer Control level, where the Call Control level includes a plurality of Media Gateway Controllers and the Bearer Control level includes a plurality of Media Gateways, each of which is controlled by a Media Gateway Controller. The method includes allocating to each Media Gateway at least one address that corresponds to one of a plurality of different addressing formats, and conveying these addresses between peer Media Gateway Controllers by encapsulating them using a Network Service Access Point addressing format.

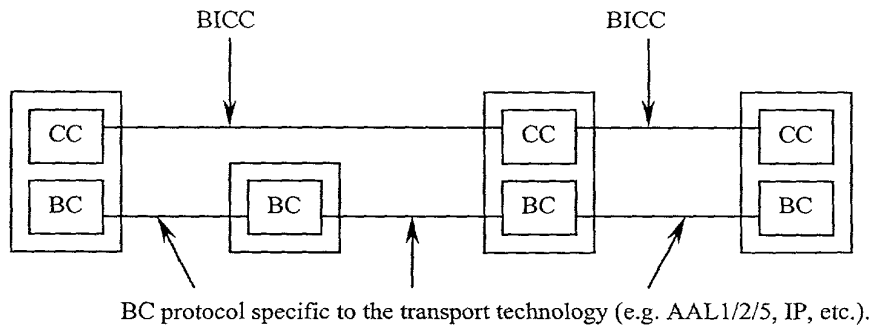


Figure 1

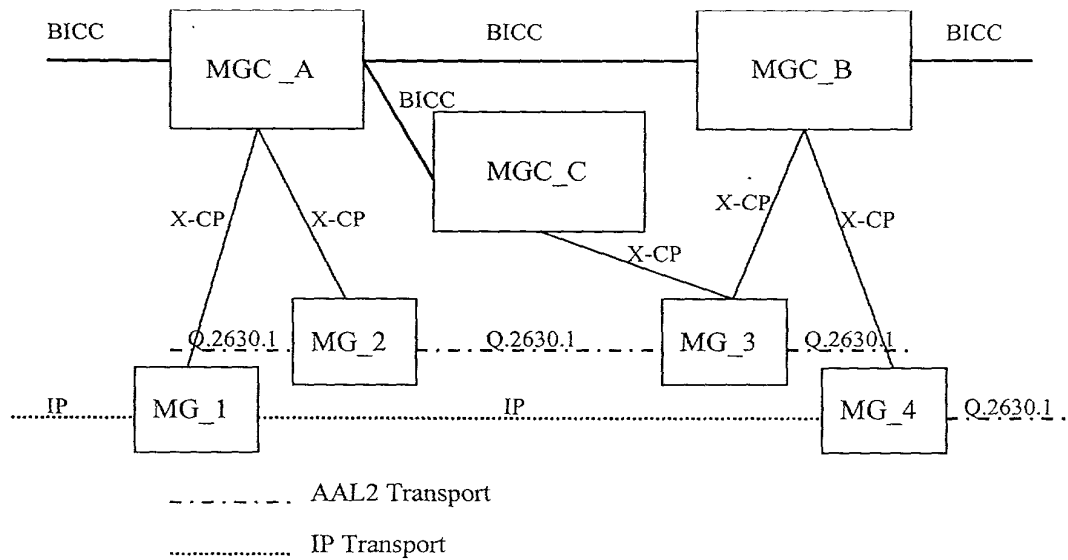
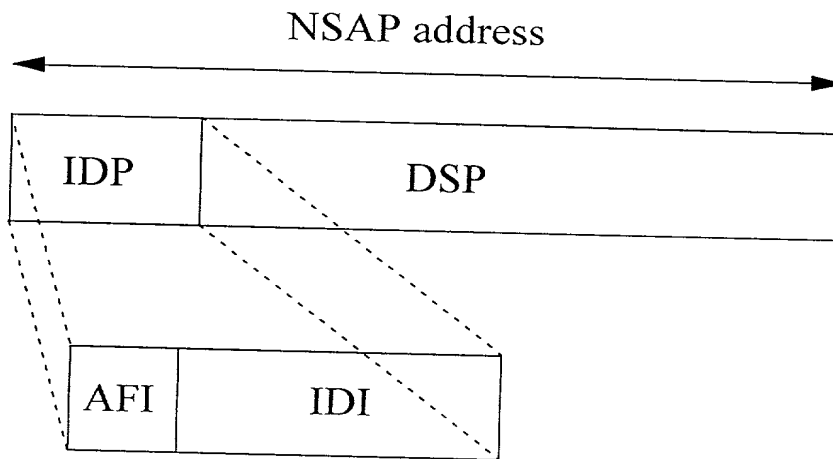


Figure 2

Figure 3

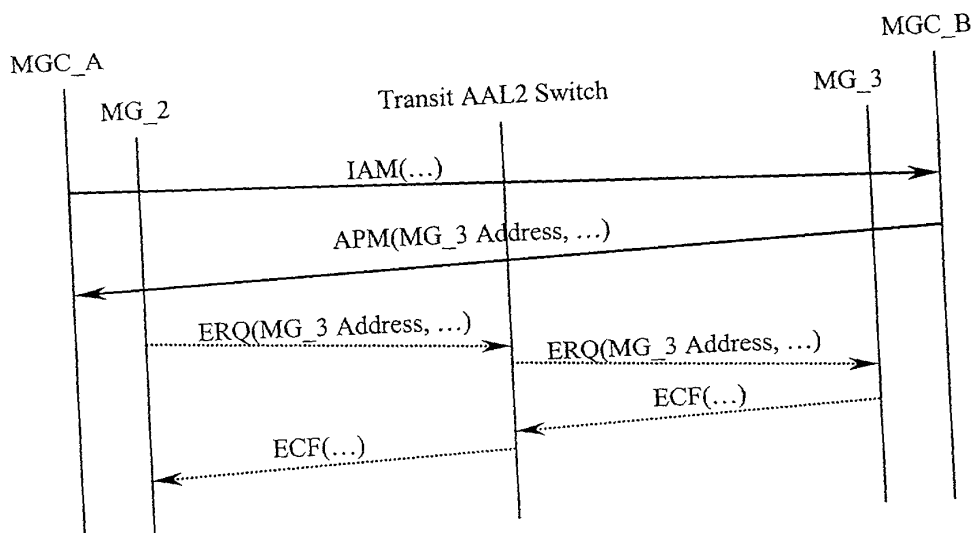


Figure 4

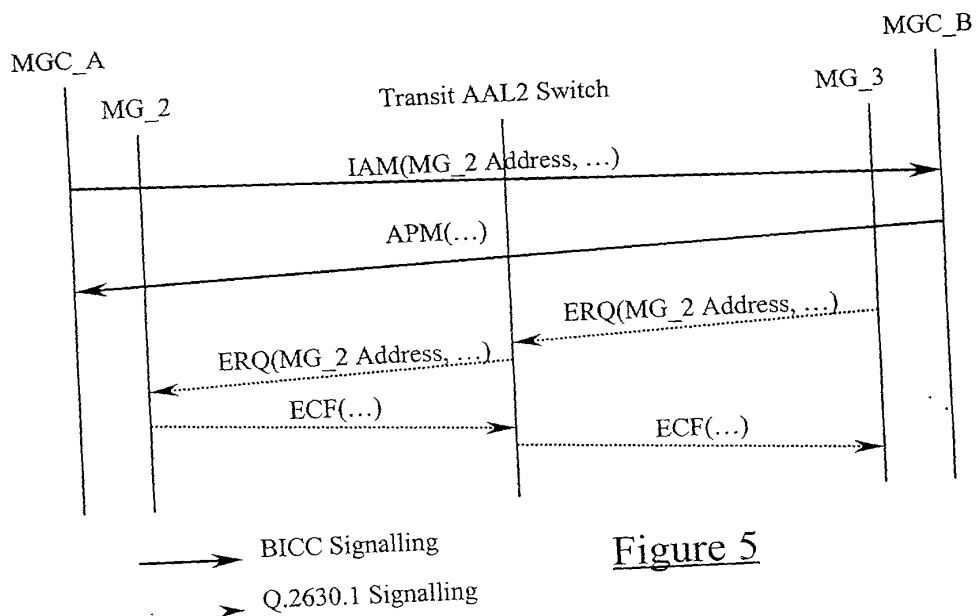


Figure 5

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NUMBER

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

ADDRESSING IN A COMMUNICATIONS NETWORK

the specification of which (check only one item below):

☒ is attached hereto

☐ was filed as United States application

Number _____

on _____

and was amended

on _____ (if applicable).

☐ was filed as PCT international application

Number _____

on _____

and was amended under PCT Article 19 and/or PCT Article 34

on _____ (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations, § 1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §§ 119 (a)-(e) of any foreign application(s) for patent or inventor's certificate or of any PCT international application(s) designating at least one country other than the United States of America listed below and have also identified below any foreign application(s) for patent or inventor's certificate or any PCT international application(s) designating at least one country other than the United States of America filed by me on the same subject matter having a filing date before that of the application(s) of which priority is claimed:

PRIOR FOREIGN/PCT APPLICATION(S) AND ANY PRIORITY CLAIMS UNDER 35 U.S.C. § 119:

| COUNTRY (if PCT, indicate "PCT") | APPLICATION NUMBER | DATE OF FILING (day, month, year) | PRIORITY CLAIMED UNDER 35 U.S.C. § 119 |
|-------------------------------------|--------------------|--------------------------------------|---|
| Great Britain | 9923121.9 | 1 October 1999 | X Yes No |
| | | | __ Yes __ No |
| | | | __ Yes __ No |
| | | | Yes No |
| | | | Yes No |

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

(Application Number) _____

(Filing Date) _____

(Application Number) _____

(Filing Date) _____

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONTINUED)
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NO.

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) or PCT international application(s) designating the United States of America that is/are listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in that/those prior application(s) in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose to the Office all information known to me to be material to the patentability as defined in Title 37, Code of Federal Regulations § 1.56, which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

PRIOR U.S. APPLICATIONS OR PCT INTERNATIONAL APPLICATIONS DESIGNATING THE U.S. FOR BENEFIT UNDER 35 U.S.C. § 120:

| U.S. APPLICATIONS | | STATUS (check one) | | |
|---------------------------------------|------------------|---|---------|-----------|
| U.S. APPLICATION NUMBER | U.S. FILING DATE | PATENTED | PENDING | ABANDONED |
| | | | | |
| | | | | |
| PCT APPLICATIONS DESIGNATING THE U.S. | | | | |
| PCT APPLICATION NO. | PCT FILING DATE | U.S. APPLICATION NUMBERS ASSIGNED (if any) | | |
| | | | | |
| | | | | |
| | | | | |

I hereby appoint the following attorneys and agent(s) to prosecute said application and to transact all business in the Patent and Trademark Office connected therewith and to file, prosecute and to transact all business in connection with international applications directed to said invention:

| | | | | | |
|-------------------------|--------|----------------------|--------|------------------------|--------|
| William L. Mathis | 17,337 | Eric H. Weisblatt | 30,505 | Charles F. Wieland III | 33,096 |
| Robert S. Swecker | 19,885 | James W. Peterson | 26,057 | Bruce T. Wieder | 33,815 |
| Platon N. Mandros | 22,124 | Teresa Stanek Rea | 30,427 | Todd R. Walters | 34,040 |
| Benton S. Duffett, Jr. | 22,030 | Robert E. Krebs | 25,885 | Ronni S. Jillions | 31,979 |
| Norman H. Stepno | 22,716 | William C. Rowland | 30,888 | Harold R. Brown III | 36,341 |
| Ronald L. Grudziecki | 24,970 | T. Gene Dillahunt | 25,423 | Allen R. Baum | 36,086 |
| Frédéric G. Michaud, Jr | 26,003 | Patrick C. Keane | 32,858 | Steven M. duBois | 35,023 |
| Alan E. Kopecki | 25,813 | Bruce J. Boggs, Jr. | 32,344 | Brian P. O'Shaughnessy | 32,747 |
| Regis E. Slutter | 26,999 | William H. Benz | 25,952 | Kenneth B. Leffler | 36,075 |
| Samuel C. Miller, III | 27,360 | Peter K. Skiff | 31,917 | Fred W. Hathaway | 32,236 |
| Robert G. Mukai | 28,531 | Richard J. McGrath | 29,195 | | |
| George A. Hovanec, Jr. | 28,223 | Matthew L. Schneider | 32,814 | | |
| James A. LaBarre | 28,632 | Michael G. Savage | 32,596 | | |
| E. Joseph Gess | 28,510 | Gerald F. Swiss | 30,113 | | |
| R. Danny Huntington | 27,903 | Michael J. Ure | 33,089 | | |

21839

and:

Address all correspondence to:



21839

Ronald L. Grudziecki
BURNS, DOANE, SWECKER & MATHIS, L.L.P.
P.O. Box 1404
Alexandria, Virginia 223 13- 1404







Address all telephone calls to: Michael G. Savage, Reg. No. 32,596 at (919) 941-9240.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

COMBINED DECLARATION FOR PATENT APPLICATION AND POWER OF ATTORNEY (CONTINUED)
(Includes Reference to Provisional and PCT International Applications)

ATTORNEY'S DOCKET NO

1

| | | |
|--|---|------------------|
| FULL NAME OF SOLE OR FIRST INVENTOR Leslie GRAF | SIGNATURE  | DATE 29/6/00 |
| RESIDENCE Melbourne, AUSTRALIA | CITIZENSHIP AUSTRALIA | |
| POST OFFICE ADDRESS 3 Hender Court, Balwyn, 3103, Melbourne, AUSTRALIA | | |
| FULL NAME OF SECOND JOINT INVENTOR, IF ANY Mark HOLLIS | SIGNATURE  | DATE 16/6/00 |
| RESIDENCE Park Orchards, AUSTRALIA | CITIZENSHIP AUSTRALIAN | |
| POST OFFICE ADDRESS 1 Daintree Avenue, Park Orchards 3114, AUSTRALIA | | |
| FULL NAME OF THIRD JOINT INVENTOR, IF ANY Stephen TERRILL | SIGNATURE  | DATE 24/06/00 |
| RESIDENCE Stockholm, SWEDEN | CITIZENSHIP AUSTRALIAN | |
| POST OFFICE ADDRESS c/-Hamacher, Flemminggatan 45, 4TR, 11232 Stockholm, SWEDEN | | |
| FULL NAME OF FOURTH JOINT INVENTOR, IF ANY Christian GROVES | SIGNATURE  | DATE 16/6/00 |
| RESIDENCE Keilor, AUSTRALIA | CITIZENSHIP AUSTRALIAN | |
| POST OFFICE ADDRESS 21 Garden Avenue, Keilor, Victoria 3036, AUSTRALIA | | |
| FULL NAME OF FIFTH JOINT INVENTOR, IF ANY Ian RYTINA | SIGNATURE  | DATE 09/08/00 |
| RESIDENCE Stockholm, SWEDEN | CITIZENSHIP BRITISH | |
| POST OFFICE ADDRESS c/o Lund, Gotlandsgatan 58, 5tr, 116 65 Stockholm, SWEDEN | | |
| FULL NAME OF SIXTH JOINT INVENTOR, IF ANY Juan NOGUERA-RODRIGUEZ | SIGNATURE  | DATE 16/06/00 |
| RESIDENCE Victoria, AUSTRALIA | CITIZENSHIP SPANISH | |
| POST OFFICE ADDRESS 3/48 Deakin Street, Essendon, Victoria 3040 AUSTRALIA | | |
| FULL NAME OF SEVENTH JOINT INVENTOR, IF ANY | SIGNATURE | DATE |
| RESIDENCE | CITIZENSHIP | |
| POST OFFICE ADDRESS | | |
| FULL NAME OF EIGHTH JOINT INVENTOR, IF ANY | SIGNATURE | DATE |
| RESIDENCE | CITIZENSHIP | |
| POST OFFICE ADDRESS | | |
| FULL NAME OF NINTH JOINT INVENTOR, IF ANY | SIGNATURE | DATE |
| RESIDENCE | CITIZENSHIP | |
| POST OFFICE ADDRESS | | |